


ECMAScript (ES) 5

Mark Volkmann
mark@ociweb.com

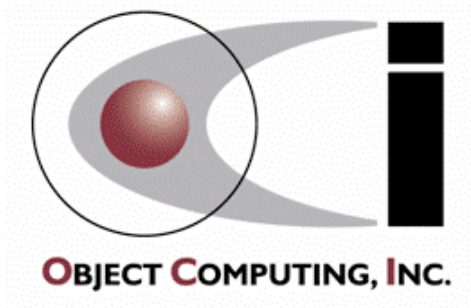

History

- **ECMAScript 1** - 6/97
- **ECMAScript 2** - 6/98 - only editorial changes
- **ECMAScript 3** - 12/99
 - regular expressions, string handling improvements
- **ECMAScript 4** - never completed
 - not backward compatible with ECMAScript 3
 - large number of changes and new features
 - very controversial
 - eventually scaled back and renamed ECMAScript 3.1, then became ...
- **ECMAScript 5** - 12/09 - 10 years after last released revision!
 - a.k.a. ECMAScript, 5th Edition
 - compatible with ECMAScript 3
 - adds object properties, "strict mode" subset, JSON support, more reflection, and a few more features
 - spec is at <http://www.ecmascript.org/> - see "Fifth Edition of ECMA-262"
- **ECMAScript Harmony** - code name of next edition; work in progress

Object Extensibility

- Refers to the ability to add properties, including functions, to objects

```
obj.p1 = foo;  
obj.p2 = function () { ... code ... };
```

- To prevent an object from being extended

```
Object.preventExtensions(obj);
```

- only works if “strict mode” is enabled

- To determine if an object is extensible

```
if (Object.isExtensible(obj)) { ... }
```

- Can't re-enable extensions

Why not
`obj.preventExtensions()`?
The rationale is that it would merge
the meta and application layers.



OBJECT COMPUTING, INC.

Object Properties

- An object “property” has
 - optional getter method, called when value is retrieved
 - can use to compute or lookup value
 - optional setter method, called when value is changed
 - can use to validate value
 - can use to set other related property values
 - “property descriptor” that includes the value and three flags described next
 - these four things are referred to as “property attributes”



OBJECT COMPUTING, INC.

Property Descriptor Flags

- **writable**

- if false, the value cannot be changed (a constant)
- only applies to properties that have a `value` attribute and no `get` or `set` attribute

- **configurable**

- if false, the property cannot be deleted from its object
- if false, the descriptor flags cannot be changed
 - except `writable` can be changed from `true` to `false`

- **enumerable**

- if false, a `for` loop will not see the property when iterating through the properties of its object

- **Default values?**

- article by John Resig at says they all default to `true`
- spec says they all default to `false` in section 8.6.1, table 7

<http://ejohn.org/blog/ecmascript-5-objects-and-properties/>



Defining a Property

- To define a property, set its initial value or `get/set` methods (not both) and set its attribute flags (if non-default value are desired)

```
Object.defineProperty(obj, "temperature", {  
  t: 98.2, // descriptor property that holds value  
  configurable: false,  
  get: function () { return t; },  
  set: function (value) { t = value; }  
});
```

`t` is not accessible outside `get` and `set` methods

`obj.temperature` calls this

`obj.temperature =` calls this

- When `get` and `set` methods are trivial like above, the following is equivalent

```
Object.defineProperty(obj, "temperature", {  
  value: 98.2,  
  configurable: false  
});
```



Defining Multiple Properties

- To define multiple properties in one call

```
var person = {};  
Object.defineProperty(person, {  
  "name": {  
    value: "Mark Volkmann",  
    configurable: false, // can't delete  
    writable: false }, // can't change  
  "age": {  
    value: 49,  
    configurable: false // can't delete  
    set: function (value) {  
      if (value < 0 || value > 110) {  
        throw new RangeError("age must be between 0 and 110");  
      }  
      age = value;  
    }  
  }  
});
```



Getting Property Names

- To get names of all enumerable properties of an object

```
var propNames = Object.keys(person); // returns ["name", "age"]  
  
// The following is preferred over the old-style  
// for (var prop in obj) {  
//   if (obj.hasOwnProperty(prop)) {  
//     ...  
//   }  
// }  
Object.keys(person).forEach(function (key) {  
  ...  
});
```

- To get array of names of all properties of an object, including those that are not enumerable

```
var propNames = Object.getOwnPropertyNames(person);
```



Retrieving a Property Descriptor

- To retrieve the property descriptor of an object property

```
var obj = { p1: "foo", p2: 19 };
var pd = Object.getOwnPropertyDescriptor(obj, "p1");
// pd = {
//   value: "foo",
//   writable: true,
//   enumerable: true,
//   configurable: true
// }
```

It seems Resig is correct, at least in the Node.js implementation.



Sealing

- Prevents property addition, property deletion and descriptor changes for an object
- To seal an object

```
Object.seal(obj);
```

- sets **configurable** property attribute to **false** for each property in the object and calls **Object.preventExtension(obj)** ;
- can still access and modify the existing properties

- To determine if an object is sealed

```
if (Object.isSealed(obj)) { ... }
```

- Cannot unseal an object



Freezing

- Same as sealing, but properties cannot be modified
- To freeze an object

```
Object.freeze(obj);
```

- To determine if an object is frozen

```
if (Object.isFrozen(obj)) { ... }
```

- Cannot unfreeze an object



OBJECT COMPUTING, INC.

11

ES5

Object Creation

- To create an object with
 - a specific prototype object
 - set of properties specified in the same way as when defining multiple properties

```
var obj = Object.create(prototypeObject, properties);
```

- To get prototype of an object

```
var prototypeObject = Object.getPrototypeOf(obj);
```



OBJECT COMPUTING, INC.

12

ES5

Strict Mode ...

- Helps avoid common coding problems
- Enabled with the directive `"use strict";`
 - opt-in model
 - include the quotes! - single or double
 - planning to drop quotes in a future version
 - just a string, so no new syntax required
 - to affect entire source file, include as first executable statement
 - doesn't affect subsequently parsed files
 - to affect a single function, include as first line in function
 - to affect a set of functions, wrap functions in an anonymous function that includes the directive and executes itself
 - `() ;` at the end
 - to affect a string of code passed to `eval`, include as first statement in string



... Strict Mode ...

- Has no effect on JavaScript engines that don't support it
 - but code that is tested that way may not run in an engine that does
- See "Annex C" in the spec for a summary of strict mode



... Strict Mode ...

- Variables must be declared before first use
 - either setting or getting
- Object literals cannot contain duplicate property names
- Octal literals are not allowed
 - numbers with a leading zero
- **with** statement cannot be used
- **delete**
 - can only be used on properties, not variables, functions or parameters
 - cannot be called on properties whose “**configurable**” attribute is **false**



... Strict Mode ...

- Functions cannot have parameters with duplicate names
- When code executed by **eval** declares new variables (with **var**) or defines new functions, they exist in a new environment, not in the environment of the caller
- Inside functions (not methods)
 - **this** is **null** rather than the global object
 - can use to test whether environment supports strict mode

```
var supportsStrict = (function () {  
    'use strict';  
    return !this;  
})();
```



... Strict Mode

- **arguments** special variable is immutable
- “**arguments**” and “**eval**” are reserved
 - cannot be used for the name of a variable, property, function, parameter or `catch` identifier
- “**arguments**” and “**caller**” are reserved
 - cannot create or modify properties with these names on function objects
- **caller** property of **Function** objects and **callee** property of **Arguments** objects cannot be accessed



New String Method

- To trim leading and trailing whitespace

```
var s2 = s.trim();  
or  
s = s.trim();
```



New Date Methods

- Create ISO string from Date

- example - '2010-11-04T00:17:15.177Z'

```
var iso = date.toISOString();
```

- Create Date from ISO string

```
var millis = Date.parse(isoString);  
var date = new Date(isoString);
```

milliseconds are since since
midnight 01 January, 1970 UTC

- Create Date representing current time

```
var millis = Date.now(); // same as new Date().getTime();
```



New Array Methods ...

- **isArray**(obj)

```
if (Array.isArray(obj)) { ... }
```

- **indexOf**(element[, fromIndex])

```
var index = arr.indexOf('yellow');
```

- **lastIndexOf**(element[, fromIndex])

```
var index = arr.lastIndexOf('yellow');
```

**Existing
Array
methods**

concat
join
pop
push
reverse
shift
slice
sort
splice
toString
toLocaleString
unshift



... New Array Methods ...

- **forEach(fn[, thisInFn])**

```
arr.forEach(function (element) { print(element); });
```

- **fn** is passed the current element, its index, and the array, but like all JS functions, it only needs to accept those it uses
- if **thisInFn** is specified, it is the value of **this** in **fn**
 - otherwise **this** is null



... New Array Methods ...

- **map(fn[, thisInFn])**

- returns a new Array created from the results of applying **fn** to each element
- **fn** takes same arguments as in **forEach**

```
var newArr = arr.map(function (element) { return element * 2; });
```

- **filter**

- returns a new Array containing all the elements for which **fn** returns true
- **fn** takes same arguments as in **forEach**
- in addition, **fn** must return a value that can be coerced to a boolean

```
var isEven = function (x) { return x % 2 === 0; }  
var evens = arr.filter(function (element) { return isEven(element); });
```

To use new Array methods in ECMAScript 3 see
<http://erik.eae.net/playground/arrayextras/>



... New Array Methods ...

● `reduce(fn[, initialValue])`

- `fn` is passed the current result, the current element, its index, and the array
- for the first call to `fn`
 - if `initialValue` is specified, it is the current result
 - if `initialValue` is not specified, the first element is the current result and the second element is the current element
- for subsequent calls to `fn`
 - the current result is the value returned by the previous call to `fn`

```
var sum = arr.reduce(function (x, y) { return x + y; });
```

● `reduceRight(fn[, initialValue])`

- same as `reduce`, but elements are processed from right to left instead of left to right



... New Array Methods

● `every(fn[, thisInFn])`

```
if (arr.every(isEven)) { ... }
```

`isEven` is defined on slide 21

- `fn` takes same arguments as in `forEach`
- in addition, `fn` must return a value that can be coerced to a boolean
- stops and returns false the first time `fn` returns `false`; otherwise returns `true`

can use these to avoid writing loops that break out before evaluating all the elements in an array

● `some(fn[, thisInFn])`

```
if (arr.some(isEven)) { ... }
```

- same as `every`, but stops and returns true the first time `fn` returns `true`; otherwise returns `false`

```
var names = 'Mark Tami Amanda Jeremy'.split(' ');
var picked;
names.some(function (name) {
  console.log('evaluating ' + name);
  var pick = name.length > 4;
  if (pick) picked = name;
  return pick;
});
console.log(picked); // Amanda
```



New Function Method

- **bind(thisInFn[, initialArgs])**

- returns a new function that invokes a given function with the value of **this** bound to a given object and initial arguments bound
- **thisInFn** is the value of **this** in **fn**
- can perform partial application
 - means creating a new function that invokes a given function with predefined values for some or all of the parameters starting at the beginning

```
var product = function (x, y) { return x * y; }  
var arr1 = [1, 2, 3];  
var arr2 = arr1.map(product.bind(null, 5));  
// arr2 = [5, 10, 15]  
  
var times5 = product.bind(null, 5);  
arr2 = arr1.map(times5);  
// same result
```

```
// Suppose f1 is a function  
// that takes a callback,  
// f2 is the callback,  
// and it takes two arguments.  
// The following are equivalent.  
f1(function () { f2(a, b); });  
f1(f2.bind(null, a, b));
```

- useful for callbacks that take arguments
 - without bind, an anonymous function must be used



New JSON Object ...

- Improves security
 - old way of creating JavaScript objects from JSON text simply executes the text as code and creates objects by treating JSON as an object literal
 - new way verifies that text being parsed is valid JSON and doesn't execute arbitrary JavaScript code
- Creating an object from a JSON string

```
var obj = JSON.parse(json[, reviverFunction]);
```

- optional reviver function
 - has **key** and **value** parameters
 - return **undefined** to delete the property
 - return some other value to transform it (ex. transform date strings to **Date** objects)



... New JSON Object

- Creating a JSON string from an object

```
var json = JSON.stringify(object[, replacer[, space]]);
```

- objects with a **toJSON** method are stringified using that
- optional **replacer** argument can be
 - a function that is passed each value to be stringified
 - return value is stringified instead of the original value
 - an array of names of properties to be included in result
- optional **space** argument can be
 - a string or number of spaces to be used in indented output for human readability
 - maximum indentation increment is ten spaces or characters

JSON doesn't support cycles in object relationships

- Can use in ES3 by downloading `json2.js`

- from Douglas Crockford
- see link at bottom of <http://www.json.org/js.html>



JSON Example

```
function Address(street, city, state, zip) {
  this.street = street;
  this.city = city;
  this.state = state;
  this.zip = zip;
}

function Person(name, address) {
  this.name = name;
  this.address = address;
}

var a = new Address(
  '644 Glen Summit', 'St. Charles', 'MO', 63304);
var p = new Person('Mark', a);
var json = JSON.stringify(p);
console.log(json);
var newP = JSON.parse(json);
console.log(newP.name + ' ' + newP.address.zip);
// Mark 63304
```

Output on one line:

```
{
  "name": "Mark",
  "address": {
    "street": "644 Glen Summit",
    "city": "St. Charles",
    "state": "MO",
    "zip": 63304
  }
}
```



Other Changes

- **Constructors**

- when called without `new` in strict mode
 - ex. `Foo()` instead of `new Foo()`
 - `this` is undefined rather than the global object, so setting properties on `this` in the constructor will throw an error

- **Objects**

- trailing commas in object literals are allowed
 - ex. `{ foo: "hello", bar: "world", }`



Resources

- **ECMAScript 5 Objects and Properties**
 - John Resig, <http://ejohn.org/blog/ecmascript-5-objects-and-properties/>
- **ECMAScript 5 Strict Mode, JSON, and More**
 - John Resig, <http://ejohn.org/blog/ecmascript-5-strict-mode-json-and-more/>
- **ECMAScript 5: The Definitive Slides**
 - David Flanagan, <http://davidflanagan.com/Talks/es5/slides.html>
- **ECMAScript 5 Compatibility Table**
 - <http://kangax.github.com/es5-compat-table/>
 - thanks to Bill Edney for telling me about this!

